

VP




Variable displacement vane pumps

*Feature:

- . Save horse power and low noise level
- . Wear and heat resistance.
- . High volume efficiency.
- . Smooth running and stable operation particular suitable for machine tools and single-purple machines.

■ Nomenclature

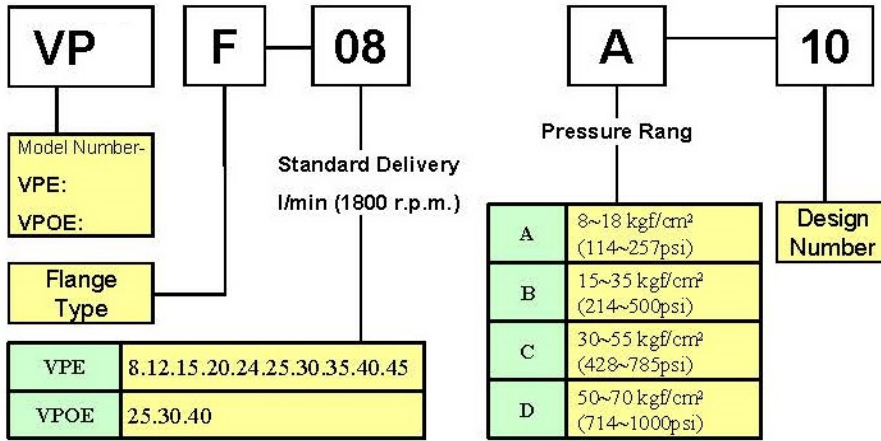

■ Specification

Model Coding	No-load Delivery (l/min, 1800 r.p.m.)	Adjusting Pressure Range kgf/cm ²	Speed (rpm)		Weight kgf
			Max.	Min.	
VPE-F8	8	A: 8~18 kgf/cm ² (114~257psi) B: 15~35 kgf/cm ² (214~500psi) C: 30~55 kgf/cm ² (428~785psi) D: 50~70 kgf/cm ² (714~1000psi)	1800	800	5.6
VPE-F12	12				
VPE-F15	15				
VPE-F20	20				
VPE-F24	24				
VPE-F25	25				
VPE-F30	30		9.5		
VPE-F35	35				
VPE-F40	40				
VPE-F45	45				
VPOE-F25	25				
VPOE-F30	30				
VPOE-F40	40	10.2			